



COMFORT




NOISE
REDUCTION



FIT

SANA 8012-I



CHARACTERISTICS

- Disposable earplugs, packaged per pair
- Excellent noise reduction
- The soft foam ensures optimal wearing comfort
- The conical shape of the earplugs makes them easy to insert
- Ideal for high-noise environments, both at work and at home
- Dispenser of 250 pairs
- Average attenuation value SNR 37 dB(A)
- Single-use product

Article number: **3.78.012.00**

SUITABLE FOR ACTIVITIES IN E.G.

- Construction
- Industry
- Shipping
- Aviation
- Automotive
- Maintenance

COLOR


Orange

SIZES

One size

PACKAGING

- 250 pairs per dispenser
- 10 dispensers in a carton




SNR 37 dB(A)

CE 2777
EN 352-2:2020

PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE DISPENSER (250 PAIRS PER DISPENSER)	EAN CODE 10 DISPENSERS (OUTER BOX)
One size	3.78.012.00	8718249077548	8718249077555

DAMPING DATA

All measurements were carried out in accordance with EN 352-2:2002.


Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	28.7	32.2	39.6	40.5	37.9	42.2	46.3
Standard Deviation (dB)	3.6	5.2	5.4	4.3	2.9	3.1	5.4
Assumed Protection (dB)	25.1	27.0	34.2	36.2	35.0	39.1	40.9

SNR = 37 dB

Nominal diameter: 5 - 10 mm

H = 37 dB H_m = 39.4 dB H_s = 2.5 dB M = 35 dB M_m = 38.1 dB M_s = 2.9 dB; L = 30 dB L_m = 34.0 dB L_s = 3.6 dB


INSTRUCTIONS FOR PLACEMENT

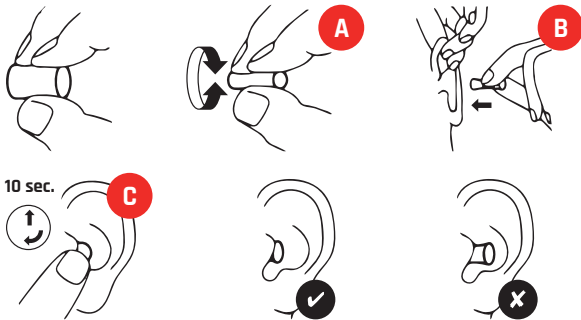

- A** Roll the earplug between your thumb and forefinger until it reaches the desired thickness.
- B** Use the other hand to lift your ear to create enough space in the ear canal to insert the earplug.
- C** Push the rolled-up earplug into the ear canal while twisting it and let it expand before entering the noisy environment.

It is important to ensure a proper fit when wearing earplugs. After using the earplugs, slowly remove them from the ear and rotate them slightly to prevent damage. **Warning:** Do not use earplugs with a cord, in case the cord gets caught or tangled.

RELATED ARTICLES



SANA 8021

Art. no. 3.78.021.00

Disclaimer: The user is responsible for the choices made based on the information provided by OXXA[®] through this document. The information should therefore not be regarded as leading with respect to the suitability of the product for a particular application. OXXA[®] reserves the right to make changes to the products shown on this product sheet. The colours of the products shown on this product sheet may differ slightly in reality. Subject to misprints and printing errors.

TESTING INSTITUTE

Tested according to European standard EN 352-2:2020 by: SATRA Technology Europe Ltd (Notified Body no.: 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland.

SATRA Technology Europe is responsible for both EU type examination and ongoing conformity.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link: www.oxxa.work/doc

YOUR SUPPLIER: