

FUJI 4015



CHARACTERISTICS

- Basic harness with a D-ring on the back and two attached textile loops on the chest that must be secured to a carabiner (to be ordered separately)
- Easily adjustable leg and chest straps
- Polyester straps and steel buckles
- For use by persons weighing up to 140 kg (including equipment) and with a height between 160 and 200 cm
- One size fits all

Article number: **8.84.015.00**

SUITABLE FOR ACTIVITIES IN E.G.

- Scaffolding construction
- Construction
- Installation technology
- Aerial work platforms
- Offshore
- Petrochemical industry

COLOR

Black/red

SIZES

L/XL

PACKAGING

- 1 piece per polybag
- 20 pieces per outer carton

CE 0598


EN 361:2002
EN 358:2018

PRODUCT INFORMATION


SIZE	ARTICLE NO.	EAN CODE 1 PIECE (POLYBAG)	EAN CODE 8 PIECES (OUTER BOX)
L/XL	8.84.015.00	8718249062032	8718249062049

USER INSTRUCTIONS AND SAFETY PRECAUTIONS:

The safety harness is a piece of personal protective equipment that should be assigned to a single user (it should only be used by one person at a time). The harness should be adjusted to the size of the user beforehand. It should fit well so that it does not slip and pinch the stomach. Follow the next steps:

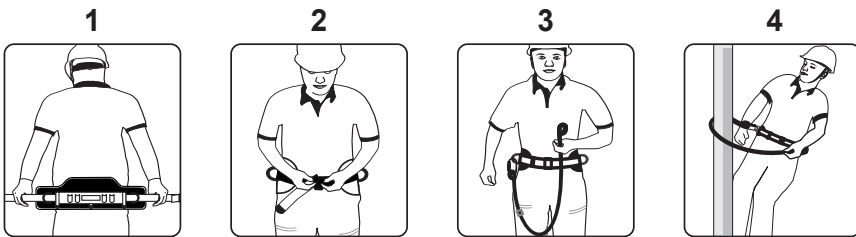

The safety harness is a piece of personal protective equipment that should be assigned to a single user (it must only be used by one person at a time). The harness should be adjusted to the size of the user beforehand. The straps must finally and always be adjusted so that the strap is in place under the buttocks and that the back panel is properly located between the shoulder blades. A harness should be buckled as close to the body as possible, without overdoing it so that the user still has freedom of movement. Follow the next steps:

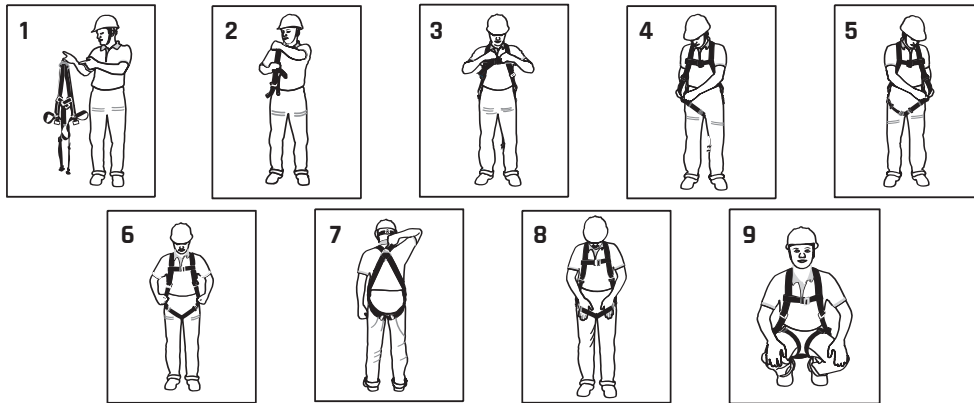

STORAGE REQUIREMENTS

During transport, keep the belt away from all sharp parts and keep it in its packaging. Clean with soap and water. Wipe with a dry cloth and hang in a ventilated area to allow it to dry naturally and away from any open flame or heat source. This also applies to parts that have become wet during use. Metal parts should be wiped down with a cloth with Vaseline oil. The use of bleach and cleaning detergents is strictly forbidden. The harness should be stored in a dark and ventilated area with a moderate temperature and away from sunlight, heat and chemical products.

TESTING INSTITUTE

This fall protection is certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link: www.oxxa.work/doc

RELATED PRODUCTS



JURA 4062

Y safety line XL with 1.5-m shock absorber
Art. no. 8.84.062.00



HELENA 4084

Positioning line adjustable 2 m
Art. no. 8.84.084.00

YOUR SUPPLIER: