

HARZ 4155



CHARACTERISTICS

- Stainless steel anchorage hook with double action
- Ideal for scaffolding pipes
- Gate Opening: 110 mm
- Breaking strength: 20 kN
- Length: 350 mm



Article number: 8.84.155.00

SUITABLE FOR WORK IN, E.G.:

- Scaffolding
- Construction
- Installation technology
- Aerial platforms
- Offshore
- Petrochemicals

PACKAGING

- 1 piece (polybag)
- 20 pieces (case)

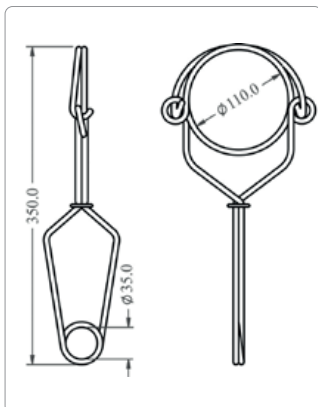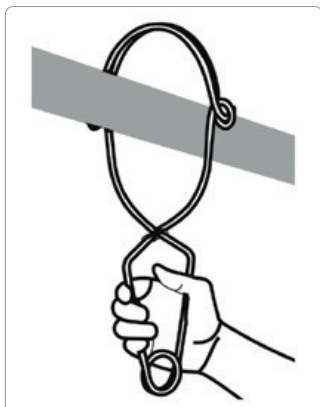

CE 0598
EN 362:2004 (Class A)



ARTICLE INFORMATION

SIZE	ARTICLE NO.	EAN CODE 1 PIECE (POLYBAG)	EAN CODE 20 PIECES (CASE)
One size	8.84.155.00	8718249077623	8718249077630

STORAGE REQUIREMENTS

Keep the anchor hook away from sharp parts during transport and store it in its packaging. Clean it with a cotton cloth or a soft brush. Do not use abrasives. The metal parts can be wiped with a cloth soaked in Vaseline oil. Bleach and detergents are strictly prohibited. The hook must be stored in a temperate, dry and ventilated place, in its packaging, protected from sunlight, heat and chemical products.

TESTING INSTITUTE

This fall protection is certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link:
www.oxxa.work/doc

YOUR SUPPLIER: