



LIQUID
PROOF



CHEMICAL
RESISTANT



COLD
RESISTANT

PVC-CHEM- WINTER 47-410



CHARACTERISTICS

- Glove with full PVC coating
- Acrylic/wool liner
- Dipped glove with scalloped edge (slip-on)
- Excellent grip in wet, dry and oily conditions
- Comfortable to wear in cold conditions due to the warm lining
- Extremely supple glove that protects the user's hand and lower arm against various chemicals
- Length: 300 mm
- Sanitised to inhibit bacterial growth, minimize odours and encourage freshness

Article number: 1.47.410.00

SUITABLE FOR ACTIVITIES IN E.G.

- Petrochemistry
- Industry
- Transport & logistics
- Cleaning services
- Shipping
- Agriculture

COLOUR

Red orange

SIZES

10/XL and 11/XXL incl.

PACKAGING

- 12 pairs per bundle
- 72 pairs per outer box

EN 388:2016



4121X

EN 511:2006



121

EN ISO 374-1:2016/Type B



AKL

EN ISO 374-5:2016




CE 0598

EN 420:2003+A1:2009

PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE 12 PAIRS (BUNDLE)	EAN CODE 72 PAIRS (OUTER BOX)
10/XL	1.47.410.10	8718249009570	8718249009587
11/XXL	1.47.410.11	8718249009600	8718249009617

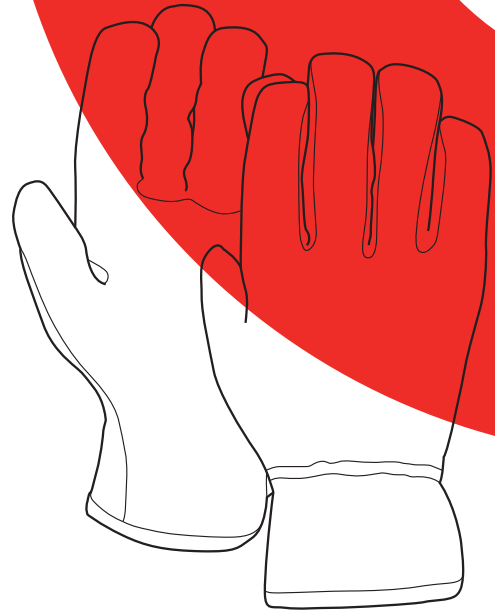

CLARIFICATION OF PICTOGRAMS

EN388:2016+A1:2019



2132X

EN388:2016+A1:2019



abcdef

Protection against mechanical hazards

A = Scuff resistance (0-4)
B = Cut resistance (0-5)
C = Tear resistance (0-4)
D = Puncture resistance (0-4)
E = Cut resistance (in accordance with EN ISO 13977 (A to F))
F = Impact resistance (optional) (P = Passed)

EN511:2006



01X

EN511:2006



abc

Protection against cold

A = Radiative cooling (0-4)
B = Contact cold (0-4)
C = Watertightness (0-1)

Note: X = untested or not applicable

STORAGE CONDITIONS

The gloves should be kept in a clean, cool and dry place and not kept compressed in their original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged during shipping.

TESTING INSTITUTE

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa-safety.com/doc

Protection against chemicals and microorganisms

EN ISO 374-1:2016/Type A		
EN ISO 374-1:2016 /Type A	Chemicals	EN 16523:2015 permeation level
 AKL	Methanol (A)	??
	40% Sodium Hydroxide (K)	6
	96% Sulphuric Acid (L)	3

EN ISO 374-4:2019	
Cas number (A) 67-56-1 (K) 1310-73-2 (L) 7664-93-9	Class Primary alcohol Inorganic base Inorganic mineral acid, oxidising
Chemicals ?? (A) 40% Sodium Hydroxide (K) 96% Sulphuric Acid (L)	Average degradation % ??% 13.5% 62.4%

Resistant against bacteria, mould and viruses

EN ISO 374-5:2016		
EN ISO 374-5:2016	Resistance against bacteria and mould	Resistance against viruses
 VIRUS	PASS	PASS

YOUR SUPPLIER: