







FLAME

ANTI STATIC

COMFORT









#### **CHARACTERISTICS**

- · Quality: 98% cotton/2% carbon, 350 gr/m²
- · Flame-retardant and antistatic
- · Equipped with drawstrings
- · Suitable for a wide range of working situations

Article number: 6.32.383.00

#### SUITABLE FOR ACTIVITIES IN E.G.

- · Petrochemistry
- Offshore
- Metal
- $\cdot$  Shipbuilding
- · Transport & logistics
- · Industry

### COLOUR

Navy blue

#### SIZES

One size

## **PACKAGING**

- $\cdot$  1 piece per polybag
- $\cdot$  100 pieces per outer box

EN ISO 11612:2015

EN ISO 11611:2015

EN 1149-5:2018



A1 A2 B1 C1 E1






CE

EN ISO 13688:2013



#### **ARTICLE INFORMATION**

SIZE	ARTICLE NO.	EAN CODE 1 ITEM (POLYBAG)	EAN CODE 100 ITEMS (OUTER BOX)
One size	6.32.383.00	8718249022463	8718249022470

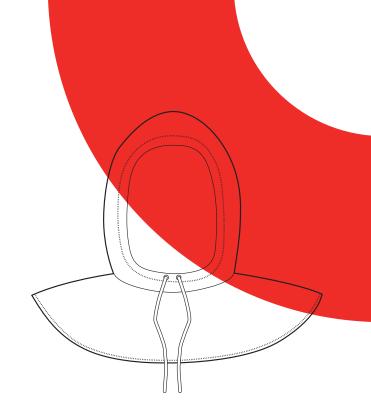

#### **WASHING INSTRUCTIONS**













#### **CLARIFICATION OF PICTOGRAMS**

EN ISO 11612:2015



A1 A2 B1 C1 E1

EN ISO 11611:2015



EN 1149-5:2018

#### Protective clothing against heat and flames

- A1: Exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure A
- A2: Exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure B
- B: Protection against convective heat (3 levels, 1 being the lowest)
- C: Protection against radiant heat (4 levels, 1 being the lowest)
- E: Protection against molten iron splash (3 levels, 1 being the lowest)

# Protective clothing for use during welding and related processes

Class 1 (lowest level): less hazardous welding situations

- A1: exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure A
- A2: exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure B

## Protective clothing with electrostatic properties

The EN 1149-5:2018 standard specifies the electrostatic requirements for electrostatic dissipative protective clothing to avoid incendiary discharges.

#### STORAGE CONDITIONS

The clothing should be kept in a clean, cool and dry place and not kept compressed in its original packaging. Do not expose the clothing to direct sunlight. Never store the clothing wet, always hang it to dry first. Make sure that the packaging and the garment are not damaged during shipping.

## **TESTING INSTITUTE**

Certified by: AITEX (0161), Plaza Emilio Sala, 1 Alcoy (Alicante) 965542200, Spain.

## **DECLARATION OF CONFORMITY**

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa-safety.com/doc

## YOUR SUPPLIER:

# **RELATED PRODUCTS**



**MATT 5199** Art. no. 2.25.199.00



**MAX 0199** Art. no. 2.30.199.00



**MALIA 5320** Art. no. 2.15.320.00